



# J / JH SERIES

THE RIGHT PUMP FOR  
TOUGH JOBS

## ELECTRIC SUBMERSIBLE SUMP PUMPS



## THE SOLUTION TO GENERAL WASTE-WATER PUMPING

HIGH HEAD OR HIGH VOLUME DRAINAGE OF CLEAN AND DIRTY WATER FROM SUMPS, BASINS AND TANKS IN PLANTS, COMMERCIAL, PUBLIC AND RESIDENTIAL FACILITIES.

# J and JH Submersible Pumps Superior Construction

## BJM air filled motors

- Class F insulation
- High temperature / amp protection
- 115, 230V - 1 phase
- 230, 460V- 3 phase
- 208, 575V available


## Double mechanical seals

- Lower: Silicon Carbide
- Upper: Carbon Ceramic
- Seal Minder® optional (not available on J400)


## Accessories

- Slide rails
- Level switches
- Pump Controls
- Alarm boxes
- ANSI flanges

**Cast iron volute and impeller 304SS motor housing for superior heat transfer.**  
**All J / JH models are available in 316SS for corrosive service.**

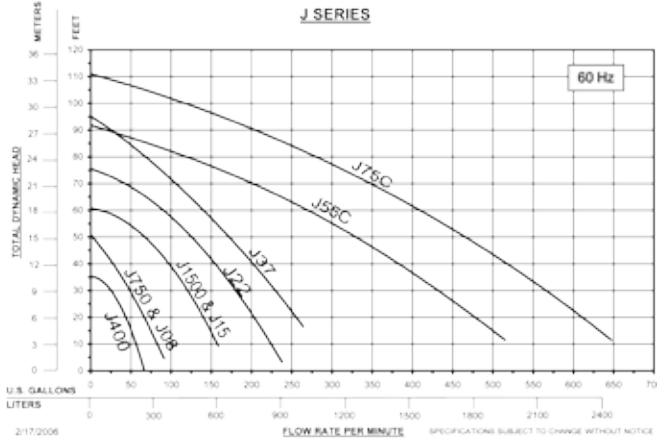

**SA**  
 C US  
 LR107915  
 J400  
 J750  
 J1500  
 J1500H  
 J15  
 J15H

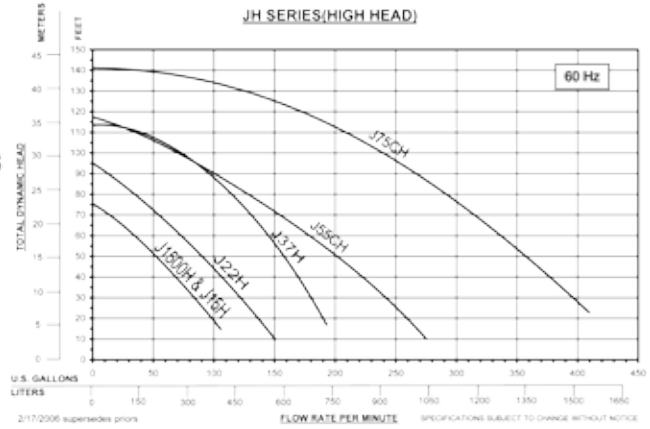

| MODEL | DISCH. SIZE | H.P. | VOLT    | PHASE | RPM  | RATED AMPS | MAX SOLIDS | MAX HEAD | MAX GPM | WEIGHT LBS. | HEIGHT | WIDTH | CABLE |
|-------|-------------|------|---------|-------|------|------------|------------|----------|---------|-------------|--------|-------|-------|
| J400  | 2"          | 0.5  | 115/230 | 1     | 3450 | 7/3.5      | 1/8"       | 35'      | 66      | 38          | 15.7"  | 8.5"  | 33'   |
| J750  | 2"          | 1    | 115/230 | 1     | 3450 | 14/7       | 3/16"      | 51'      | 91      | 66          | 17.3"  | 11.2" | 33'   |
| J1500 | 3"          | 2    | 230     | 1     | 3450 | 14         | 3/16"      | 60'      | 158     | 84          | 18.7"  | 12.5" | 50'   |
| J08   | 2"          | 1    | 230/460 | 3     | 3450 | 3/1.5      | 3/16"      | 51'      | 91      | 60          | 15.2"  | 11.2" | 33'   |
| J15   | 3"          | 2    | 230/460 | 3     | 3450 | 6/3        | 3/16"      | 60'      | 158     | 72          | 16.4"  | 11.2" | 33'   |
| J22   | 3"          | 3    | 230/460 | 3     | 3450 | 9/4.5      | 3/8"       | 75'      | 237     | 96          | 18.5"  | 12.5" | 33'   |
| J37   | 3" or 4"    | 5    | 230/460 | 3     | 3450 | 14/7       | 3/8"       | 95'      | 264     | 108         | 19.7"  | 12.5" | 33'   |
| J55C  | 4"          | 7.5  | 230/460 | 3     | 3450 | 21/10.5    | 3/8"       | 92'      | 515     | 233         | 25.5"  | 20.5" | 33'   |
| J75C  | 4"          | 10   | 230/460 | 3     | 3450 | 30/15      | 3/8"       | 110'     | 647     | 258         | 27.75" | 20.5" | 33'   |

| MODEL  | DISCH. SIZE | H.P. | VOLT    | PHASE | RPM  | RATED AMPS | MAX SOLIDS | MAX HEAD | MAX GPM | WEIGHT LBS. | HEIGHT | WIDTH | CABLE |
|--------|-------------|------|---------|-------|------|------------|------------|----------|---------|-------------|--------|-------|-------|
| J1500H | 2"          | 2    | 230     | 1     | 3450 | 14         | 3/16"      | 75'      | 105     | 84          | 18.7"  | 12.5" | 50'   |
| J15H   | 2"          | 2    | 230/460 | 3     | 3450 | 6/3        | 3/16"      | 75'      | 105     | 66          | 16.4"  | 11.2" | 33'   |
| J22H   | 2"          | 3    | 230/460 | 3     | 3450 | 9/4.5      | 3/8"       | 95'      | 150     | 94          | 18.5"  | 12.5" | 33'   |
| J37H   | 2"          | 5    | 230/460 | 3     | 3450 | 14/7       | 3/8"       | 113'     | 192     | 108         | 19.7"  | 12.5" | 33'   |
| J55CH  | 3"          | 7.5  | 230/460 | 3     | 3450 | 21/10.5    | 3/8"       | 117'     | 274     | 227         | 25.5"  | 20.5" | 33'   |
| J75CH  | 4"          | 10   | 230/460 | 3     | 3450 | 30/15      | 3/8"       | 141'     | 409     | 252         | 27.75" | 20.5" | 33'   |

SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

|  |              |
|--|--------------|
| <br>123 Spencer Plain Road<br>P.O. Box 1138<br>Old Saybrook, CT 06475<br>Tel: (860)-399-5937<br>Toll Free: (877)-BJM-PUMP<br>Fax: (860)-399-7784<br>Web: www.bjmpumps.com | Distributor: |
|--|--------------|