

XP-SK SERIES



THE RIGHT PUMP FOR
TOUGH JOBS



FM APPROVED EXPLOSION PROOF FOR
CLASS 1, DIV. 1 GROUPS C & D LOCATIONS



- BJM SHREDDER™ PUMPS ARE DESIGNED AND BUILT TO "EAT", DESTROYING SOLIDS BY TEARING, BREAKING AND RIPPING THEM TO PIECES.
- TUNGSTEN CARBIDE TOOTHED CUTTING IMPELLER
- 360 DEGREE SHREDDING ACTION
- HARDENED CHROME IRON WEAR PLATE & IMPELLER
- NON-SPARKING SLIDE RAILS AVAILABLE

The unique construction and solids handling of the BJM Shredder™ pump makes it the choice for municipal wastewater and industrial wastewater applications.

XP-SK SERIES

BJM Shredder™ pump with FM approved motor

CLASS F INSULATION, AIR FILLED MOTOR

DOUBLE MECHANICAL SEAL

Sic v. Sic / Carbon v. Ceramic


MOTOR DESIGN

208 / 230 / 460 / 575V 3 Phase 1.15 service factor
Class F Insulation, Air Filled Motor

LEAKAGE DETECTORS IN SEAL CHAMBER:
Single or Dual

TWO THERMAL OVERLOAD PROTECTORS

TWO PART EPOXY COATING

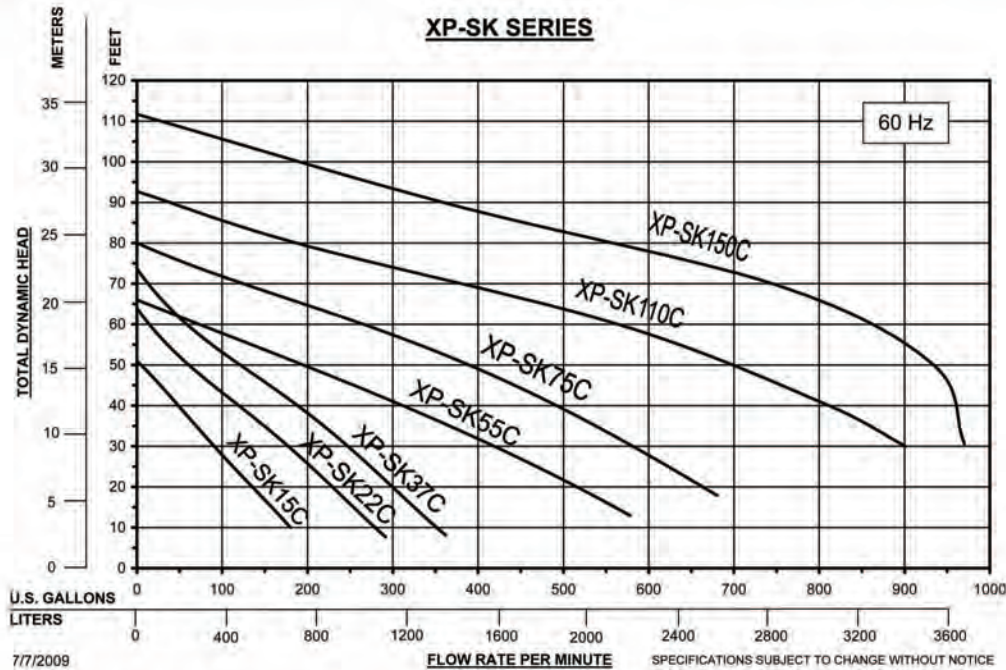

MODEL	DISH. SIZE	H.P.	PHASE	RPM	MAX SOL-IDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
XP-SK15C	3"	2	3	3450	2.5"	50'	180	157	29.5"	14.75"	33'
XP-SK22C	3"	3	3	3450	2.5"	64'	291	166	29.75"	15.25"	33'
XP-SK37C	3"	5	3	3450	3"	73'	362	178	31.0"	15.25"	33'
XP-SK55C	4"	7.5	3	1750	3.5"	64'	580	393	43.5"	29.5"	33'
XP-SK75C	4"	10	3	1750	3.5"	80'	680	413	43.5"	29.5"	33'
XP-SK110C	6"	15	3	1750	3.5"	92'	870	578	48.5"	35.15"	33'
XP-SK150C	6"	20	3	1750	3.5"	110'	900	772	57.0"	35.15"	33'

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



123 Spencer Plain Road
P.O. Box 1138
Old Saybrook, CT 06475

Tel: (860)-399-5937
Toll Free: (877)-BJM-PUMP
Fax: (860)-399-7784

Web: www.bjmpumps.com

Distributor: