



J / JH SERIES

THE RIGHT PUMP FOR
TOUGH JOBS

ELECTRIC SUBMERSIBLE SUMP PUMPS



THE SOLUTION TO GENERAL WASTE-WATER PUMPING

HIGH HEAD OR HIGH VOLUME DRAINAGE OF CLEAN AND DIRTY WATER FROM SUMPS, BASINS AND TANKS IN PLANTS, COMMERCIAL, PUBLIC AND RESIDENTIAL FACILITIES.

J and JH Submersible Pumps Superior Construction

BJM air filled motors

- Class F insulation
- High temperature / amp protection
- 115, 230V - 1 phase
- 230, 460V- 3 phase
- 208, 575V available


Double mechanical seals

- Lower: Silicon Carbide
- Upper: Carbon Ceramic
- Seal Minder® optional (not available on J400)


Accessories

- Slide rails
- Level switches
- Pump Controls
- Alarm boxes
- ANSI flanges

Cast iron volute and impeller 304SS motor housing for superior heat transfer.
All J / JH models are available in 316SS for corrosive service.

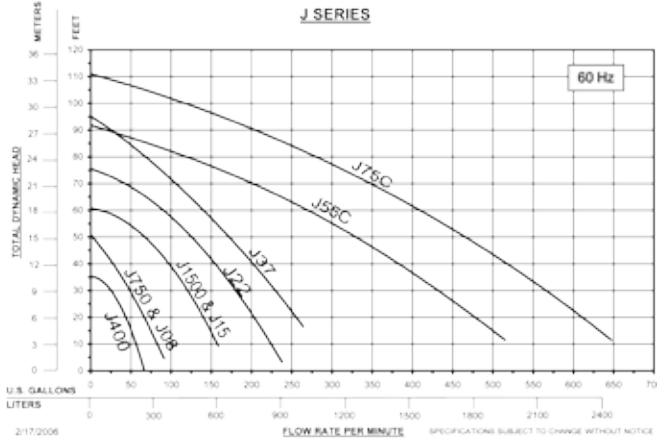

SA
 C US
 LR107915
 J400
 J750
 J1500
 J1500H
 J15
 J15H

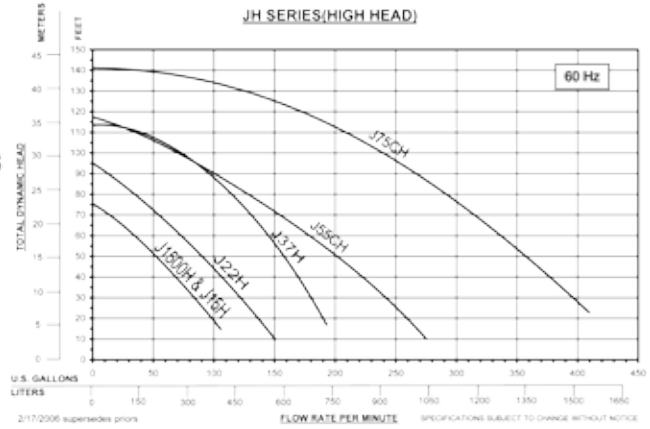

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
J400	2"	0.5	115/230	1	3450	7/3.5	1/8"	35'	66	38	15.7"	8.5"	33'
J750	2"	1	115/230	1	3450	14/7	3/16"	51'	91	66	17.3"	11.2"	33'
J1500	3"	2	230	1	3450	14	3/16"	60'	158	84	18.7"	12.5"	50'
J08	2"	1	230/460	3	3450	3/1.5	3/16"	51'	91	60	15.2"	11.2"	33'
J15	3"	2	230/460	3	3450	6/3	3/16"	60'	158	72	16.4"	11.2"	33'
J22	3"	3	230/460	3	3450	9/4.5	3/8"	75'	237	96	18.5"	12.5"	33'
J37	3" or 4"	5	230/460	3	3450	14/7	3/8"	95'	264	108	19.7"	12.5"	33'
J55C	4"	7.5	230/460	3	3450	21/10.5	3/8"	92'	515	233	25.5"	20.5"	33'
J75C	4"	10	230/460	3	3450	30/15	3/8"	110'	647	258	27.75"	20.5"	33'

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
J1500H	2"	2	230	1	3450	14	3/16"	75'	105	84	18.7"	12.5"	50'
J15H	2"	2	230/460	3	3450	6/3	3/16"	75'	105	66	16.4"	11.2"	33'
J22H	2"	3	230/460	3	3450	9/4.5	3/8"	95'	150	94	18.5"	12.5"	33'
J37H	2"	5	230/460	3	3450	14/7	3/8"	113'	192	108	19.7"	12.5"	33'
J55CH	3"	7.5	230/460	3	3450	21/10.5	3/8"	117'	274	227	25.5"	20.5"	33'
J75CH	4"	10	230/460	3	3450	30/15	3/8"	141'	409	252	27.75"	20.5"	33'

SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

 123 Spencer Plain Road P.O. Box 1138 Old Saybrook, CT 06475 Tel: (860)-399-5937 Toll Free: (877)-BJM-PUMP Fax: (860)-399-7784 Web: www.bjmpumps.com	Distributor:
--	--------------